


2:1 Glossy Polyolefin Heatshrink Tubing

2:1 Glossy Polyolefin heatshrink tubing is the ideal way to create a tight, professional finish on any wire, hose, or cable management project. Once shrunk, the tubing will hold its reduced state even in elevated temperatures. The wide range of diameters and the attractive glossy finish makes this heatshrink a perfect solution for any termination application.

- Shrink Temp. 239°F
- Excellent UV Resistance
- Good Electrical Properties & Chemical Resistance

Nominal Size	Part #	Unshrunk Diameter	Shrunk Diameter	Standard Spool Put-Ups		Available Colors	Lbs/100'
				Bulk Spool	Shop Spool		
1/8"	H2G0.13	3.2mm	1.6mm	500'	25'	CL,WH,RD,BK	0.43
3/16"	H2G0.19	4.8mm	2.4mm	200'	25'	CL,WH,RD,BK	0.60
1/4"	H2G0.25	6.4mm	3.2mm	200'	25'	CL,WH,RD,BK	1.04
3/8"	H2G0.38	9.5mm	4.7mm	200'	25'	CL,WH,RD,BK	1.31
1/2"	H2G0.50	12.7mm	6.4mm	200'	25'	CL,WH,RD,BK	1.52
3/4"	H2G0.75	19.1mm	9.5mm	100'	25'	CL,WH,RD,BK	2.58
1"	H2G1.00	25.4mm	12.7mm	100'	25'	CL,WH,RD,BK	3.74
1 1/2"	H2G1.50	38.1mm	19.1mm	100'	25'	CL,WH,RD,BK	5.53
2"	H2G2.00	50.8mm	25.4mm	100'	25'	CL,WH,RD,BK	8.25

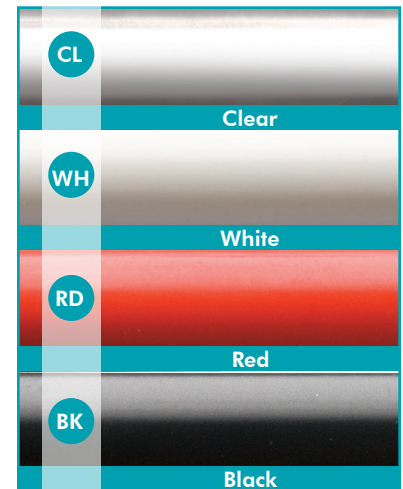

Contact your account representative for heatshrink cutting & printing services.


2:1 Kynar® - Semi-Rigid Heatshrink Tubing

Kynar® is a highly flame-retardant tubing that is tough and abrasion resistant in mechanical environments. The product is recommended for applications for strain relieving components such as soldered connections and splices.



Nominal Size	Part #	Unshrunk Diameter	Shrunk Diameter	Bulk Box Put Up/4'Pcs.	Shop Box Put Up/4'Pcs.	Available Colors	Lbs/10Pcs.
3/64"	H2K0.05	1.2mm	0.6mm	200	25	CL & BK	0.03
1/16"	H2K0.06	1.6mm	0.8mm	200	25	CL & BK	0.05
3/32"	H2K0.09	2.4mm	1.2mm	200	25	CL & BK	0.06
1/8"	H2K0.13	3.2mm	1.6mm	200	25	CL & BK	0.07
3/16"	H2K0.19	4.8mm	2.4mm	200	25	CL & BK	0.10
1/4"	H2K0.25	6.4mm	3.2mm	200	25	CL & BK	0.15
3/8"	H2K0.38	9.5mm	4.7mm	200	25	CL & BK	0.25
1/2"	H2K0.50	12.7mm	6.4mm	100	25	CL & BK	0.30
3/4"	H2K0.75	19.1mm	9.5mm	50	25	CL & BK	0.50
1"	H2K1.00	25.6mm	12.7mm	50	25	CL & BK	0.80

- Shrink Temp. 347°F
- Mil-I-DTL-23053/8
- Flame Retardant

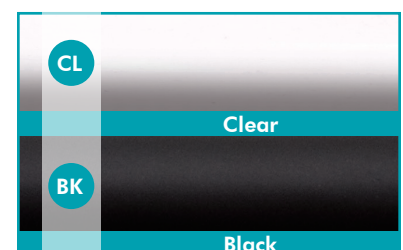

Kynar® is a registered trademark of the Arkema Corporation.