
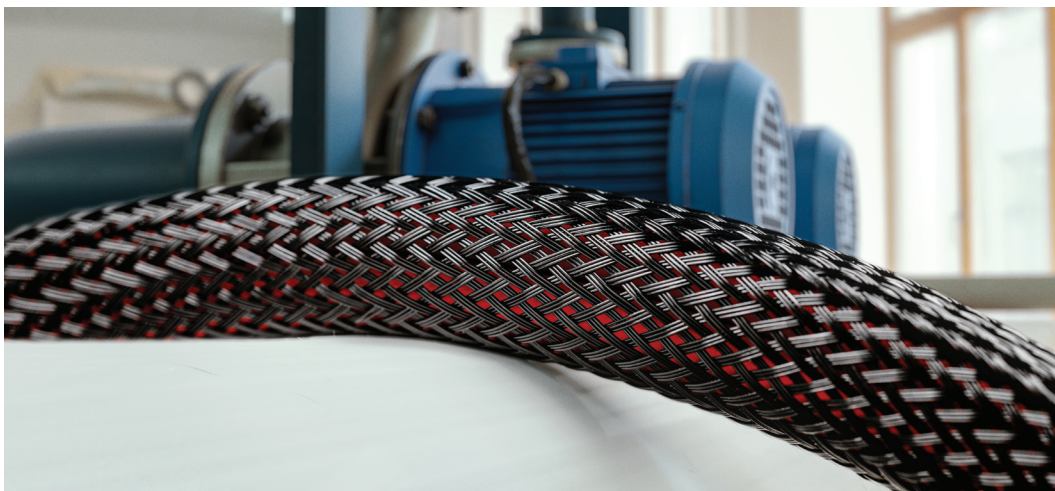


Premium Polymer Construction

- **Ultra Flexible**
- **Base and Acid Resistant**
- **Chemical Resistant**
- **Resists Moisture**
- **Expands Up To 150%**
- **Temperature Range -94°F to 257°F**
- **Melt Temp. 482°F**

Flexo® Poly-Pro (PPN) was developed for applications where high flexibility and specific chemical properties are a must. Made from Polypropylene, Flexo® Poly-Pro is a highly specialized polymer option for your next project. It will not break as a result of continual movement and will maintain its shape after many cycles of bending and flexing which makes it an ideal solution for many applications. Not only that, Flexo® Poly-Pro is also boasts resistance to a wide range of bases, acids, and moisture absorption. The lightweight polymer itself also has outstanding resistance to electrical current. For these reasons, Flexo® Poly-Pro is often used in water treatment applications and where direct exposure to a wide range of other environmental conditions are found. This sleeving is a cinch to install over long runs due to its high expansion and ultra-flexibility and cuts best with a hot knife.

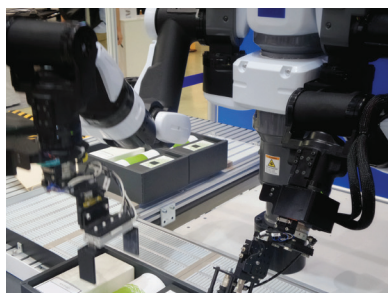

Nominal Size	Part #	Expansion Range		Standard Spool Put-Ups		Available Colors	Lbs/ 100'
		Min.	Max.	Bulk Spool	Shop Spool		
1/8"	PPN0.13BK	3/32"	1/4"	1,000'	225'	Black (BK)	0.100
1/4"	PPN0.25BK	1/8"	3/8"	1,000'	200'	Black (BK)	0.159
3/8"	PPN0.38BK	3/16"	1/2"	500'	125'	Black (BK)	0.330
1/2"	PPN0.50BK	1/4"	3/4"	500'	100'	Black (BK)	0.450
3/4"	PPN0.75BK	1/2"	1 1/4"	250'	75'	Black (BK)	0.660
1"	PPN1.00BK	5/8"	1 5/8"	250'	65'	Black (BK)	0.740
1 1/4"	PPN1.25BK	3/4"	1 3/4"	250'	50'	Black (BK)	0.880
1 1/2"	PPN1.50BK	1"	2 1/8"	200'	40'	Black (BK)	1.300
1 3/4"	PPN1.75BK	1 1/4"	2 3/4"	200'	30'	Black (BK)	1.590
3"	PPN3.00BK	2 1/2"	5 1/8"	100'	50'	Black (BK)	2.320
3 End Construction							
2"	PP32.00BK	1 1/2"	3 1/2"	200'	50'	Black (BK)	1.449

