



2:1 Viton® - Flexible Heatshrink Tubing

Viton® is a rubber-like, highly fluid-resistant, flame retardant fluoro-elastomer heat-shrinkable tubing with high solvent resistance. The product is recommended for bundling, harnessing, and environmental protection within engine compartments.

Nominal Size	Part #	Unshrunk Diameter	Shrunk Diameter	Standard Spool Put-Ups		Available Colors	Lbs/100'
				Bulk Spool	Shop Spool		
1/8"	H2V0.13BK	3.2mm	1.6mm	200'	100'	Black (BK)	1.26
3/16"	H2V0.19BK	4.8mm	2.4mm	200'	100'	Black (BK)	1.45
1/4"	H2V0.25BK	6.4mm	3.2mm	200'	100'	Black (BK)	1.68
3/8"	H2V0.38BK	9.5mm	4.7mm	200'	100'	Black (BK)	2.27
1/2"	H2V0.50BK	12.7mm	6.4mm	100'	50'	Black (BK)	2.29
5/8"	H2V0.63BK	16.0mm	8.0mm	100'	50'	Black (BK)	2.50
3/4"	H2V0.75BK	19.1mm	9.5mm	100'	50'	Black (BK)	4.14
7/8"	H2V0.88BK	22.4mm	11.0mm	50'	25'	Black (BK)	4.83
1"	H2V1.00BK	25.4mm	12.7mm	50'	25'	Black (BK)	5.73
1 1/4"	H2V1.25BK	31.7mm	15.7mm	50'	25'	Black (BK)	8.20
1 1/2"	H2V1.50BK	38.1mm	19.1mm	50'	25'	Black (BK)	8.80
2"	H2V2.00BK	50.8mm	25.4mm	50'	25'	Black (BK)	13.40

- Shrink Temp. 347°F
- Mil-I-DTL-23053/13
- Flame Retardant
- Resistant to Highly Corrosive Acids, Fluids, Fuels, & Solvents
- High Operating Temp. 392°F for Extreme Working Conditions

Viton® is a registered

trademark of DuPont Performance Elastomers.


2:1 Kynar® - Semi-Rigid Heatshrink Tubing

Kynar® is a highly flame-retardant tubing that is tough and abrasion resistant in mechanical environments. The product is recommended for applications for strain relieving components such as soldered connections and splices.



Nominal Size	Part #	Unshrunk Diameter	Shrunk Diameter	Bulk Box Put Up/4'Pcs.	Shop Box Put Up/4'Pcs.	Available Colors	Lbs/10Pcs.
3/64"	H2K0.05	1.2mm	0.6mm	200	25	CL & BK	0.03
1/16"	H2K0.06	1.6mm	0.8mm	200	25	CL & BK	0.05
3/32"	H2K0.09	2.4mm	1.2mm	200	25	CL & BK	0.06
1/8"	H2K0.13	3.2mm	1.6mm	200	25	CL & BK	0.07
3/16"	H2K0.19	4.8mm	2.4mm	200	25	CL & BK	0.10
1/4"	H2K0.25	6.4mm	3.2mm	200	25	CL & BK	0.15
3/8"	H2K0.38	9.5mm	4.7mm	200	25	CL & BK	0.25
1/2"	H2K0.50	12.7mm	6.4mm	100	25	CL & BK	0.30
3/4"	H2K0.75	19.1mm	9.5mm	50	25	CL & BK	0.50
1"	H2K1.00	25.6mm	12.7mm	50	25	CL & BK	0.80

- Shrink Temp. 347°F
- Mil-I-DTL-23053/8
- Flame Retardant

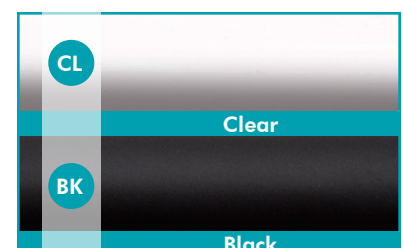

Kynar® is a registered trademark of the Arkema Corporation.